



North American Pipe Corporation™

ASTM D2729: Sewer & Drain Pipe

North American Pipe's Sewer & Drain ASTM D2729 PVC product line is manufactured to meet the needs of residential waste water control, residential, commercial, industrial, and agricultural rain leader and storm runoff systems, radon remediation and other non-pressure applications. With top quality raw materials and modern processing technology, North American Pipe's Sewer & Drain ASTM D2729 pipe meets all industry standards in addition to our own rigorous quality control standards. North American Pipe's Sewer & Drain ASTM D2729 pipe utilizes deep socket bells throughout the entire product offering. North American Pipe produces 3", 4" and 6" diameter Sewer & Drain pipe in both solid wall and various perforated configurations. Whether specifying or installing our pipe you can be assured that North American Pipe will provide the pipe "Right, On Time, All the Time".



Short Form Specification ASTM D2729 Sewer & Drain Pipe


Pipe Standard:	ASTM D2729
Pipe Compound:	ASTM D4396 Cell Class 11432
End Type:	Belled
Applications:	Residential Wastewater
Color:	White
Lay Length:	10'
Installation:	North American Pipe's Installation Guide for Solvent Welded PVC Pipe

Rev: 04/2012



North American Pipe Corporation™

ASTM D2729: Sewer & Drain Pipe

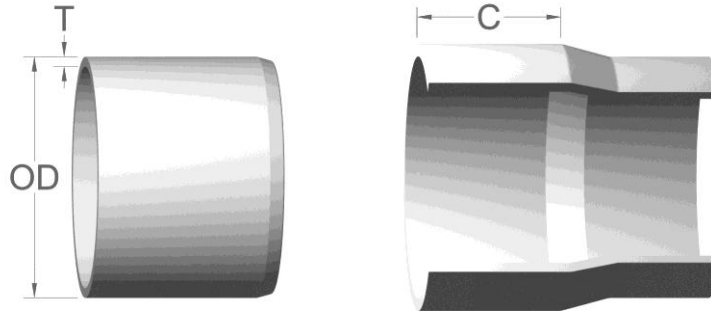

NOMINAL PIPE SIZE	OUTSIDE DIA. – NOM. (OD)	**APPROX. BELL DEPTH (C)	Sch 40 (T)
3"	3.50	4.25	.300
4"	4.50	5.50	.337
6"	6.61	7.00	.432

Perforated pipe is supplied with 2 rows of ½" diameter holes every 5 inches. Rows are parallel to the axis of the pipe and are 120° apart. Alternate hole spacing and diameters are available.

Note: These dimensions are for estimating purposes only