



# North American Pipe Corporation™

## ASTM F758: Highway Underdrain Pipe

North American Pipe's Solvent Weld ASTM F758 Highway Underdrain PVC product line is manufactured to meet the needs of highway and airport underdrain. With top quality raw materials and modern processing technology, North American Pipe's Solvent Weld ASTM F758 Highway Underdrain pipe meets all industry standards in addition to our own rigorous quality control standards. North American Pipe's Solvent Weld ASTM F758 pipe utilizes deep socket bells throughout the entire product offering. North American Pipe produces Highway Underdrain pipe in perforated configurations. Whether specifying or installing our pipe you can be assured that North American Pipe will provide the pipe "Right, On Time, All the Time".



### Short Form Specification ASTM F758 Highway Underdrain Pipe


<b>Pipe Standard:</b>	ASTM F758
<b>Pipe Compound:</b>	ASTM D1784 Cell Class 12454
<b>End Type:</b>	Belled
<b>Applications:</b>	Highway & Airport Underdrain
<b>Color:</b>	Green
<b>Lay Length:</b>	10'
<b>Installation:</b>	North American Pipe's Installation Guide for Solvent Welded PVC Pipe

Rev: 04/2012



# North American Pipe Corporation™

## ASTM F758: Highway Underdrain Pipe

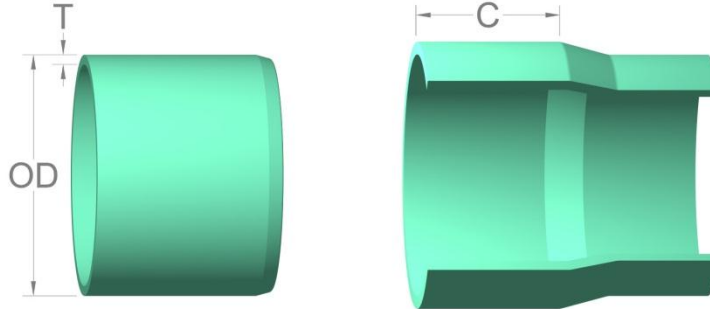

NOMINAL PIPE SIZE	OUTSIDE DIA. – NOM. (OD)	**APPROX. BELL DEPTH (C)	(T)
4"	4.22	4.00	.120
6"	6.28	5.00	.180
8"	8.40	6.00	.240

4", 6" & 8" perforated pipe is supplied with 4 rows of 1/4" to 3/8" diameter holes every 3 inches. Perforated pipe shall be perforated in accordance to ASTM F-758.

Note: These dimensions are for estimating purposes only